


ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China
Email:wp@cnjingganrefractory.com/sdwenping@163.com
Contact:Rose Tel/Wechat:+86-13275332819
Tel:86-533-4188518 Fax:86-533-4188518

Electric Furnace Cover

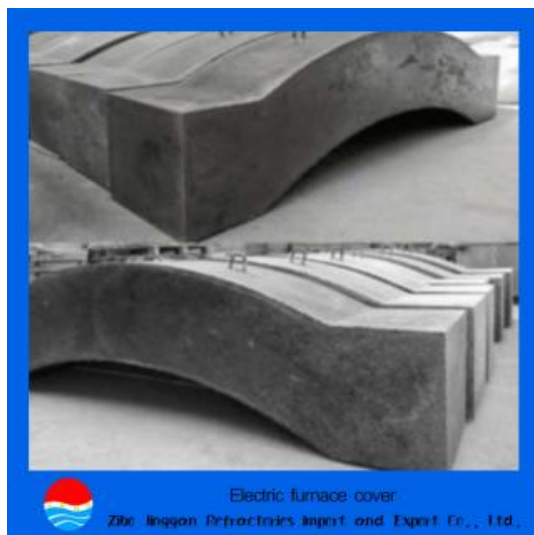

1,Introduction:The electric furnace cover is a large-scale prefabricated product, which is including high aluminum quality and corundum quality, It is made of special grade Calcined Bauxite and corundum as main material and aluminate cement as binder through pouring, vibration molding, drying, demoulding and baking. The baking temperature of the product is 400 °C - 600 °C, the use times of high aluminum products are 80-110 times, and the use times of corundum products are 160-220 times.

2, Characteristics of Electric Furnace Cover:

- 1) Good integrity, convenient construction
- 2) Strong resistance to arc radiation
- 3) It has good resistance to rapid cooling and heating
- 4) High strength in cold state and hot state
- 5) Resistance to steel slag and high temperature airflow erosion

3,Application: VD furnace cover, VOD furnace cover, LF furnace cover, tundish cover

4, Main performance parameters of Electric Furnace Cover

ITEM	UNIT	DLG-70	DLG-90
Al ₂ O ₃	%	>70	>90
Density	g/cm ³	110℃*24h, 2.80 1500℃*3h, 2.75	110℃*24h, 2.95 1500℃*3h, 2.90
Linear change rate	1500 ℃ *3h,%	±0.7	0-+0.5
Flexural strength	Mpa	110℃*24h, 5	110℃*24h, 10

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

		1500℃*3h, 15	1500℃*3h, 18
Compressive strength	Mpa	110℃*24h, 25 1500℃*3h, 50	110℃*24h, 60 1500℃*3h, 70

5,Good feedback of product use effect,the products have been exported to South Korea, Russia,Pakistan

6,We are a professional supplier, who can provide customers with free product technology, use and other issues

Do you want to find a professional supplier of refractory products?

Do you want to find a professional supplier of graphite electrodes?

Do you want to find a stable and credible supplier?

Then let's contact with jinggan company

Contact me:

Email:wp@cnjingganrefractory.com/sdwenping@163.com

TEL: 86-0533-4188518 / **FAX:** 86-0533-4188518

Rose:+86-13275332819(wechat/whatsapp number)